

# Visual-Inertial REQUEST for Attitude Determination of Multirotor Aerial Vehicles

Davi A. Santos, Raphael Ballet, Éder A. Moura

April 28, 2016

## Abstract

The present paper proposes a visual-inertial attitude estimator for multirotor aerial vehicles (MAV). The vehicle is assumed to be equipped with a 3-axis rate-gyro and a downward-pointing camera, both rigidly fixed on its structure. The method is based on the REQUEST algorithm, which is a well-known solution to the problem of attitude determination from vector measurements. Here the camera provides the vector measurements defined as unit vectors pointing from the camera optical center to known landmarks. The method is evaluated via Monte Carlo simulations which shows its performance for different number of visible landmarks and different values of a fading factor parameter of the method.

## 1 Introduction

In the last fifteen years we saw a fast development of the research on automatic control of micro aerial vehicles (MAV). For example, see the paper [1] and the video [2]. Nevertheless, in order to realize acrobatic flights like those described in the afore-cited works, it was crucial to adopt an expensive tracking system for pose estimation using stationary infrared cameras [3]. In other words, there is still room for research and technological development in navigation (estimation of position and velocity) and attitude determination of MAVs, aiming at improving their performance and reliability, specially for operations in urban areas and indoors.

Motivated by applications in the aerospace area, the research on attitude determination (AD) has been developing since the 1950 decade and remain active in the current days [4]. More recently, the literature on MAV has become concerned with AD, but we claim that it can be still enriched with the formalism, notations, and methods inherited from the aerospace literature.

The well-known Wahba Problem [5], published in 1966, first formalized the attitude estimation from pairs of vector measurements, as a constrained least-squares problem. Until the 2000 decade, many methods, considered as the seminal ones, appeared for solving this problem; they can be classified into: batch methods [6], and recursive methods [7, 8, 10–13, 15, 16, 19]. The reference [9] re-visits seven different methods of solution to the Wahba Problem.

Regarding the attitude representation, the attitude quaternion is the preferred one. This is because the quaternion has the minimal number of parameters (four) for a global parameterization of the 3D attitude without singularity [20]. Moreover, it presents a linear kinematics equation [17], and therefore allows a good computational efficiency in attitude simulation.

In particular, a batch quaternion estimator named QUEST [6] became very popular in the aerospace community (see [18], p. 189). As a batch method, the QUEST does not use vector measurements taken in the past to estimate the attitude at the current time. Therefore, to completely estimate

the 3D attitude, at least two vector measurements are required at each time instant. For attitude determination of MAVs, the two conventional vectors are the direction of the gravity acceleration (measured by a 3-axis accelerometer) and the direction of the local magnetic field (measured by a 3-axis magnetometer) [25, 26].

Despite of its popularity, after the publication of EKF-like methods [8, 11–13] and improvements in onboard computer technology, the QUEST became obsolete for not considering all the measurement history to estimate the quaternion at the current time. Bar-Itzhack [10] proposed a recursive version of the QUEST method, which was named REQUEST. It is worth mentioning that different from the batch methods, the recursive ones can estimate the attitude using only one vector measurement at a time, since this vector varies sufficiently throughout the vehicle’s motion. However, the use of redundant vectors improve the estimator both in performance and reliability. The REQUEST method has a fadding factor  $\rho$  to deal with the rate-gyro noise in a suboptimal manner. Almost ten years later, Choukroun [14] proposed the Optimal-REQUEST algorithm, which improved the REQUEST by formulating an optimal factor  $\rho$  related to the covariances of the measurement noises. However, we argue that it is quite easy to tune the parameter  $\rho$  in the REQUEST method by trial and error, since it is scalar and it is the unique parameter to adjust.

The MAV literature has been intensively reporting the use of camera systems onboard MAVs for navigation and SLAM. Although some of these works include attitude in their estimation scheme, most of them are mainly concerned with position and velocity estimation [23]. The paper [22] presents a clear and extensive review about movement estimation from camera measurements, by several distinct approaches, starting from horizon-based methods and passing through vanishing points, optical flow, and methods based on stereo camera systems.

The present paper investigates the problem of attitude determination of MAVs, using a strapdown downward-pointing camera and a 3-axis rate-gyro. A landmark map of the flight terrain is assumed to be available. The attitude estimation method adopted here is the REQUEST [10]. The main contribution of this work is the formulation of vector measurements (required not only in the REQUEST, but in any Wahba-based method) as unit vectors given the direction of landmarks with respect to the optical center of the camera. The method is evaluated by Monte Carlo simulations, showing that it is a good alternative to the attitude estimation based on magnetometers and accelerometers and revealing its performance against the number of visible landmarks. The remaining text is organized in the following manner. Section 2 formally defines the AD problem, while Section 3 presents a solution to it. Section 4 presents the Monte Carlo simulation results. Finally, Section 5 presents the concluding remarks.

## 2 Problem Statement

Consider the MAV and the two Cartesian Coordinate Systems (CCS) illustrated in Fig. 1. The body CCS  $S_B \triangleq \{\hat{x}_B, \hat{y}_B, \hat{z}_B\}$  is attached to the vehicle structure, at its center of mass (denoted by  $P$ ) and has its z-axis,  $\hat{z}_B$ , perpendicular to the rotor plane. The reference CCS  $S_R \triangleq \{\hat{x}_R, \hat{y}_R, \hat{z}_R\}$  is fixed on the ground at point  $O$  and has its z-axis,  $\hat{z}_R$ , aligned with the local vertical. Fig. 1 also illustrates a set of  $q$  landmarks positioned at the points  $P_1, P_2, \dots, P_q$ .

Assume that the camera is set with its optical center at  $P$  and there is a 3-axis rate-gyro installed parallel to  $S_B$ . Define the unit vectors  $\hat{s}_i$  which describe the direction from  $P$  to  $P_i$ , for  $i = 1, \dots, q$ . Denote the algebraic representation of  $\hat{s}$  in  $S_B$  and  $S_R$  by  $\mathbf{b}_i \in \mathbb{R}^3$  and  $\mathbf{r}_i \in \mathbb{R}^3$ , respectively. The

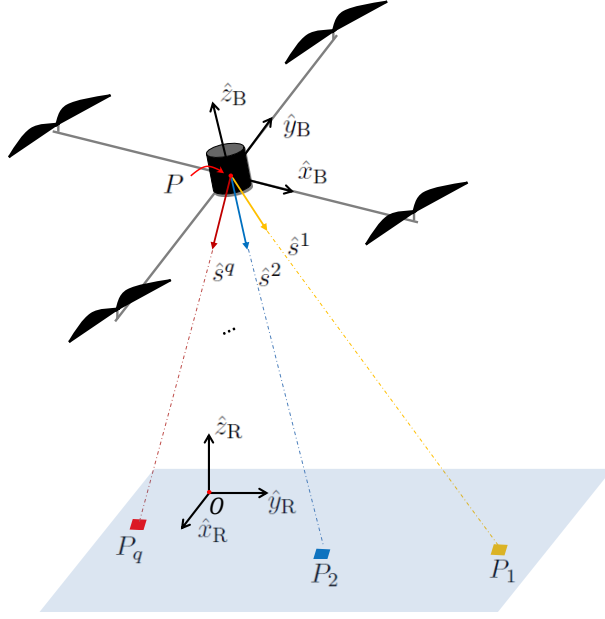


Figure 1: The Cartesian coordinate systems, the multirotor vehicle, and the flight environment.

representations  $\mathbf{b}_i$  and  $\mathbf{r}_i$  are related to each other by  $\mathbf{b}_i = \mathbf{D}\mathbf{r}_i$ , where  $\mathbf{D} \in \text{SO}(3)$  is the attitude matrix of  $S_B$  w.r.t.  $S_R$ .

Assume that the MAV position  $P$  and the landmark positions  $P_1, P_2, \dots, P_q$  w.r.t.  $S_R$  are known. Assume also that, at an arbitrary sampling instant  $k$ , only a number  $n < q$  of landmarks is visible. Note that as the vehicle moves, the set of visible landmarks is changing. Denote the indices of such visible landmarks by  $i_1, i_2, \dots, i_n$ . Based on the above assumptions, define the time sequence of pairs of vector measurements as:

$$\mathcal{V}(k) \triangleq \{(\check{\mathbf{b}}_{i_1}(k), \check{\mathbf{r}}_{i_1}(k)), (\check{\mathbf{b}}_{i_2}(k), \check{\mathbf{r}}_{i_2}(k)), \dots, (\check{\mathbf{b}}_{i_n}(k), \check{\mathbf{r}}_{i_n}(k))\}, \quad (1)$$

where  $\check{\mathbf{b}}_i$  and  $\check{\mathbf{r}}_i$ ,  $\forall i = i_1, \dots, i_n$ , are measures at instant  $k$  of  $\mathbf{b}_i$  and  $\mathbf{r}_i$ , respectively. Note that the number of vector measurement pairs in  $\mathcal{V}(k)$  varies over time  $k$ .

Now, in order to define a measurement model (relating the vector measurements with the desired attitude), consider just one arbitrary vector measurement pair  $(\check{\mathbf{b}}_i(k), \check{\mathbf{r}}_i(k)) \in \mathcal{V}(k)$ , for some  $i \in \{i_1, \dots, i_n\}$ . The measurement model used here is given by

$$\check{\mathbf{b}}_i(k) = \mathbf{D}(\mathbf{q}(k))\check{\mathbf{r}}_i(k) + \delta\mathbf{b}_i(k), \quad (2)$$

where  $\{\delta\mathbf{b}_i(k)\}$  is a zero-mean white Gaussian sequence with covariance  $\mathbf{R}_i(k)$ ; and  $\mathbf{q}(k) \in \mathbb{R}^4$  is the attitude quaternion which parameterizes  $\mathbf{D}$  at instant  $k$ . The expression  $\mathbf{D}(\mathbf{q})$  denotes the attitude matrix of  $S_B$  w.r.t.  $S_R$  corresponding to  $\mathbf{q}$ . It is given by [18]

$$\mathbf{D}(\mathbf{q}(k)) = (q^2 - \mathbf{e}^T\mathbf{e})\mathbf{I}_3 + 2\mathbf{e}\mathbf{e}^T - 2q[\mathbf{e}\times], \quad (3)$$

where  $[\mathbf{e}\times]$  denotes the cross-product matrix of  $\mathbf{e} \triangleq [e_1 \ e_2 \ e_3]^\top$ ,

$$[\mathbf{e}\times] \triangleq \begin{bmatrix} 0 & -e_3 & e_2 \\ e_3 & 0 & -e_1 \\ -e_2 & e_1 & 0 \end{bmatrix}. \quad (4)$$

On the other hand, the attitude kinematics model can be expressed as [17]

$$\mathbf{q}(k+1) = \mathbf{\Phi}(k)\mathbf{q}(k), \quad (5)$$

with

$$\mathbf{\Phi}(k) \triangleq \exp \left\{ \frac{1}{2} \begin{bmatrix} -[\boldsymbol{\omega}(k)\times] & \boldsymbol{\omega}(k) \\ -\boldsymbol{\omega}(k)^\top & \mathbf{0}_{1\times 3} \end{bmatrix} \Delta t \right\}, \quad (6)$$

where  $\boldsymbol{\omega}(k)$  is the  $S_B$  representation of the angular velocity of  $S_B$  w.r.t.  $S_R$  and  $\Delta t$  is the sampling period.

Finally, let the rate-gyro measurement  $\check{\boldsymbol{\omega}}(k) \in \mathbb{R}^3$  at instant  $k$  be modeled by

$$\check{\boldsymbol{\omega}}(k) = \boldsymbol{\omega}(k) + \delta\boldsymbol{\omega}(k), \quad (7)$$

where  $\{\delta\boldsymbol{\omega}(k)\} \in \mathbb{R}^3$  is a zero-mean white Gaussian sequence with covariance  $\mathbf{Q}(k)$ .

The main problem of the present paper is to recursively estimate  $\mathbf{q}(k)$  using the kinematic model (5), the measurement models (2) and (7), the sequence of rate-gyro measurements  $\{\check{\boldsymbol{\omega}}(1), \check{\boldsymbol{\omega}}(2), \dots, \check{\boldsymbol{\omega}}(k)\}$ , and the sequence of vector measurements  $\{\mathcal{V}(1), \mathcal{V}(2), \dots, \mathcal{V}(k)\}$ .

### 3 Problem Solution

The present section proposes a solution to the attitude determination problem defined in Section 2 using the REQUEST algorithm [10]. First, the Wahba problem as well as the QUEST method are reviewed.

#### 3.1 The Wahba Problem and the QUEST Algorithm

The Wahba problem for computing the quaternion estimate  $\hat{\mathbf{q}}(k)$  at instant  $k$  can be stated as the minimization of

$$J(\mathbf{q}(k)) = \frac{1}{2} \sum_{i=1}^n a_i \|\check{\mathbf{b}}_i(k) - \mathbf{D}(\mathbf{q}(k))\check{\mathbf{r}}_i(k)\|^2, \quad (8)$$

subject to  $\|\mathbf{q}(k)\| = 1$ , where  $(\check{\mathbf{b}}_i(k), \check{\mathbf{r}}_i(k))$  is the pair of vector measurements (defined in Section 2),  $\mathbf{D}(\mathbf{q}(k))$  is the attitude matrix corresponding to the quaternion  $\mathbf{q}(k)$  (see equation (3)),  $a_i$  is a positive weight associated with the  $i$ th measurement pair, and  $n$  is the number of vector measurements available at instant  $k$ .

The minimization problem of equation (8) can be replaced by the maximization of [6]

$$G(\mathbf{q}(k)) = \mathbf{q}(k)^\top \mathbf{K}(k) \mathbf{q}(k), \quad (9)$$

where

$$\mathbf{K}(k) \triangleq \begin{bmatrix} \mathbf{S}(k) - \sigma(k)\mathbf{I}_3 & \mathbf{z}(k) \\ \mathbf{z}(k)^\top & \sigma(k) \end{bmatrix} \in \mathbb{R}^{4 \times 4}, \quad (10)$$

$$\mathbf{S}(k) \triangleq \mathbf{B}(k) + \mathbf{B}(k)^\top \in \mathbb{R}^{3 \times 3}, \quad (11)$$

$$\sigma(k) \triangleq \frac{1}{m(k)} \sum_{i=1}^n a_i \check{\mathbf{b}}_i(k)^\top \check{\mathbf{r}}_i(k) \in \mathbb{R}, \quad (12)$$

$$\mathbf{B}(k) \triangleq \frac{1}{m(k)} \sum_{i=1}^n a_i \check{\mathbf{b}}_i(k) \check{\mathbf{r}}_i(k)^\top \in \mathbb{R}^{3 \times 3}, \quad (13)$$

$$\mathbf{z}(k) \triangleq \frac{1}{m(k)} \sum_{i=1}^n a_i [\check{\mathbf{b}}_i(k) \times] \check{\mathbf{r}}_i(k) \in \mathbb{R}^3, \quad (14)$$

and

$$m(k) \triangleq \sum_{i=1}^n a_i. \quad (15)$$

The solution  $\hat{\mathbf{q}}(k)$  to the maximization of  $G(\mathbf{q}(k))$  in (9) is given by following eigenvalue/eigenvector equation:

$$\mathbf{K}(k)\hat{\mathbf{q}}(k) = \lambda\hat{\mathbf{q}}(k), \quad (16)$$

where  $\lambda$  is the maximum eigenvalue of  $\mathbf{K}(k)$ . In other words, the solution  $\hat{\mathbf{q}}(k)$  is the eigenvector corresponding to the maximum eigenvalue of  $\mathbf{K}(k)$ . Reference [6] presents an efficient algorithm for solving the above eigenvalue/eigenvector problem; this is the well-known QUEST algorithm. The same paper also shows that  $\lambda$  is close to 1 (for noise-free measurements, it is exactly 1). In short, the cited work shows that the optimal Gibbs vector (see [17], for information about different attitude parameterizations) is given by

$$\mathbf{p}(k) = [(\lambda + \sigma(k))\mathbf{I}_3 - \mathbf{S}(k)]^{-1} \mathbf{z}(k), \quad (17)$$

and the corresponding quaternion is given by

$$\hat{\mathbf{q}}(k) = \frac{1}{\sqrt{(1 + \mathbf{p}(k)^\top \mathbf{p}(k))}} \begin{bmatrix} \mathbf{p}(k) \\ 1 \end{bmatrix}. \quad (18)$$

### 3.2 The REQUEST Algorithm

The formulation presented here is based on the original work [10]. Particularly, in the present work, since the visible landmarks can change throughout the MAV motion, we consider that a variable number  $n(k)$  of vector measurements is taken at the  $k$ th algorithm iteration.

Let us denote by  $\mathbf{K}_{j|k}$  the QUEST  $\mathbf{K}$  matrix at instant  $j$ , but constructed with vector measurements taken up to instant  $k$ . Assume that  $\mathbf{K}(k|k)$  is given at instant  $k$ . According to the REQUEST method, the prediction of the  $\mathbf{K}$  matrix is given by

$$\mathbf{K}(k+1|k) = \check{\Phi}(k)\mathbf{K}(k|k)\check{\Phi}(k)^\top, \quad (19)$$

where  $\check{\Phi}(k)$  is the quaternion transition matrix with the same form of (6), but computed with the rate-gyro measurement  $\check{\omega}(k)$  instead of the true angular velocity  $\omega(k)$ .

On the other hand, to update  $\mathbf{K}$  with new pairs of vector measurements taken at instant  $k+1$ ,

one can use

$$\mathbf{K}(k+1|k+1) = \frac{\rho m(k)}{\rho m(k) + \delta m(k+1)} \mathbf{K}(k+1|k) + \frac{1}{\rho m(k) + \delta m(k+1)} \delta \mathbf{K}(k+1), \quad (20)$$

where  $0 \leq \rho \leq 1$  is a fading factor tuned to reduce the effect of rate-gyro measurement errors on the estimation of  $\mathbf{K}$  and

$$m(k+1) = m(k) + \delta m(k+1), \quad (21)$$

$$\delta m(k+1) = \sum_{i=1}^{n(k)} a_i, \quad (22)$$

$$\delta \mathbf{K}(k+1) \triangleq \begin{bmatrix} \delta \mathbf{S}(k+1) - \delta \sigma(k+1) \mathbf{I}_3 & \delta \mathbf{z}(k+1) \\ \delta \mathbf{z}(k+1)^\top & \delta \sigma(k+1) \end{bmatrix}, \quad (23)$$

$$\delta \mathbf{S}(k+1) \triangleq \delta \mathbf{B}(k+1) + \delta \mathbf{B}(k+1)^\top, \quad (24)$$

$$\delta \mathbf{B}(k+1) \triangleq \sum_{i=1}^{n(k)} a_i \check{\mathbf{b}}_i(k+1) \check{\mathbf{r}}_i(k+1)^\top, \quad (25)$$

$$\delta \mathbf{z}(k+1) \triangleq \sum_{i=1}^{n(k)} a_i [\check{\mathbf{b}}_i(k+1) \times] \check{\mathbf{r}}_i(k+1), \quad (26)$$

$$\delta \sigma(k+1) \triangleq \sum_{i=1}^{n(k)} a_i \check{\mathbf{b}}_i(k+1)^\top \check{\mathbf{r}}_i(k+1). \quad (27)$$

Finally, the desired quaternion estimate  $\hat{\mathbf{q}}(k+1|k+1)$  at instant  $k+1$  using information up to instant  $k+1$  is obtained in the same way as in the QUEST method (see equations (17)-(18)) as the eigenvector of  $\mathbf{K}(k+1|k+1)$  corresponding to the maximum eigenvalue of the same matrix.

## 4 Method Evaluation

The attitude motion is simulated with the quaternion kinematic equation [17] excited by a true angular velocity  $\boldsymbol{\omega}$  of  $S_B$  w.r.t.  $S_R$  that induces a cone motion. The representation in  $S_B$  of such an angular velocity is given by [24]

$$\boldsymbol{\omega}(t) = \begin{bmatrix} -\Omega^p \sin \theta^c \cos(\Omega^p t) \\ -\Omega^p \sin \theta^c \sin(\Omega^p t) \\ \Omega^p (\cos \theta^c - 1) \end{bmatrix}, \quad (28)$$

where  $t$  is the continuous time,  $\Omega^p \in \mathbb{R}$  is the precession rate and  $\theta^c \in \mathbb{R}$  is the cone angle.

The vector measurements are simulated using equation (2), taking into account a total of four landmarks, whose positions are represented in  $S_R$  by the points  $P_1 = [0.3 \ 0.2 \ 1]^\top$ ,  $P_2 = [0.5 \ 0.8 \ 1]^\top$ ,  $P_3 = [0.7 \ 0.3 \ 1]^\top$ ,  $P_4 = [0.5 \ 0.5 \ 1]^\top$ . Moreover, without loss of generality, the vehicle's center of mass is assumed to be fixed at  $P = [0.5 \ 0.5 \ 0.4]^\top$ . Therefore, assuming that the  $S_R$  representation of the vector measurements are noise-free, we have

$$\check{\mathbf{r}}_1 = \begin{bmatrix} -0.2857 \\ -0.4286 \\ 0.8571 \end{bmatrix}, \quad \check{\mathbf{r}}_2 = \begin{bmatrix} 0 \\ 0.4472 \\ 0.8944 \end{bmatrix}, \quad \check{\mathbf{r}}_3 = \begin{bmatrix} 0.3015 \\ -0.3015 \\ 0.9045 \end{bmatrix}, \quad \check{\mathbf{r}}_4 = \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}. \quad (29)$$

The parameter values used in the simulation model are all listed in Table 1.

Table 1: Parameters of the ground-truth model.

Sampling time	$\Delta t = 0.05$ s
Simulation period	$\Delta t \times k_f = 10$ s
Covariance of the vector measurement errors	$\mathbf{R}_i(k) = 1.6 \times 10^{-3} \mathbf{I}_3, \forall i$
Covariance of the rate-gyro measurement errors	$\mathbf{Q}(k) = 7.1 \times 10^{-7} \mathbf{I}_3$
Precession rate	$\Omega^p = 60$ degree/s
Cone angle	$\theta^c = 20$ degree

Here, we use the REQUEST method reviewed in Subsection 3.2 to estimate the vehicle's attitude quaternion throughout the coning motion. The weighting factors associated with the vector measurements are chosen as  $a_i = 1, \forall i$ .

In order to evaluate the performance of the method, Monte Carlo simulations with 1000 are realized. The principal Euler angle corresponding to the true attitude error is considered as a figure of merit. It is given by

$$\epsilon(k) = \arccos \left( \frac{\text{tr}(\mathbf{D}(\hat{\mathbf{q}}(k|k))\mathbf{D}(\mathbf{q}(k))^T) - 1}{2} \right). \quad (30)$$

The simulation is repeated for different values of the fading factor  $\rho$  and different number  $n$  of visible landmarks. The sample mean  $\mu_\epsilon$  and standard deviation  $\sigma_\epsilon$  of  $\epsilon(k)$  at the final discrete time  $k_f$  for each combination of  $\rho$  and  $n$  are registered in Table 2.

Table 2: Monte Carlo simulation results. The quantities  $\mu_\epsilon$  and  $\sigma_\epsilon$  are, respectively, the simple mean and sample standard deviation of  $\epsilon(k_f)$ , where  $k_f$  is the final discrete-time instant.

$n$	$\rho$	$(\mu_\epsilon, \sigma_\epsilon)$
2	0	(3.95, 1.93)
	0.5	(2.42, 1.12)
	0.95	(1.05, 0.33)
3	0	(3.40, 1.61)
	0.5	(2.13, 0.89)
	0.95	(0.98, 0.26)
4	0	(3.16, 1.54)
	0.5	(1.98, 0.84)
	0.95	(0.96, 0.27)

In Table 1, one can see an improvement in performance as the fading factor  $\rho$  and the number of visible landmarks  $n$  are increased. However, the observed improvement when  $n$  is changed from  $n = 3$  to  $n = 4$  is not significant, which suggest that  $n = 3$  is a good choice. From the equations of the REQUEST method in Subsection (3.2), we conclude that if  $\rho = 0$ , and therefore no past measurements are considered in the current estimate, this algorithm is degenerated into the QUEST method reviewed in Subsection 3.1. In this case, we observe the worst performance. Figure 2 shows a time plot of  $\mu_\epsilon(k)$  and  $\mu_\epsilon + \sigma_\epsilon(k)$  for  $n = 3$  and  $\rho = 0.95$ .

It is worth mentioning two important cases that are not shown in Table 2. The first one is when we consider only  $n = 1$  visible landmark. In this case, the matrix within the brackets in equation (17) becomes singular and then we cannot extract the attitude estimate from the  $\mathbf{K}$  matrix. The second case is when we set the fading factor in  $\rho = 1$ . In this case, there is no fading factor at all and thus the attitude estimates show a divergent behavior, as seen in Figure 3. This divergence is due to

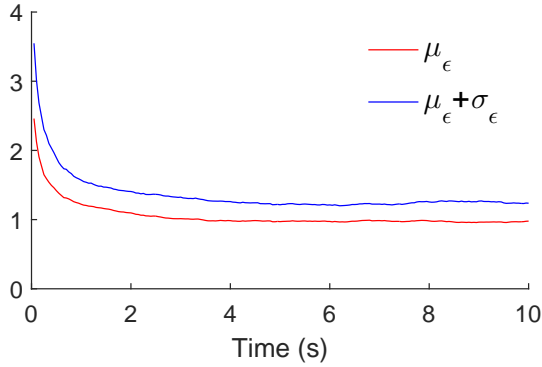


Figure 2: Sample mean and standard deviation of  $\epsilon$  for  $n = 3$  and  $\rho = 0.95$ .

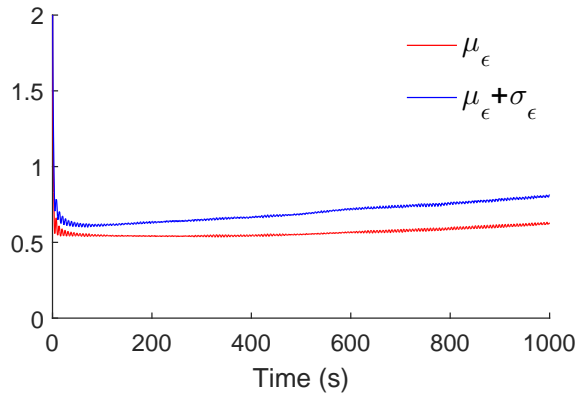


Figure 3: Sample mean and standard deviation of  $\epsilon$  for  $n = 4$  and  $\rho = 1$ .

the time propagation of past vector measurements using noisy rate-gyro measurements; the fadding factor  $\rho$  was introduced in [10] just to avoid such a divergence.

## 5 Concluding Remarks

The classic Wahba problem was recast here for MAV attitude determination setting the vector measurements as the unit vectors pointing from the optical center of a downward-pointing camera to landmarks within its field of view. The REQUEST algorithm was chosen here as the solution method due to its simple implementation and tuning. Moreover, it fits well the problem, since it is originally formulated in a way that permits a variable number of vector measurements over the time.

In this paper, we brought the formalism on attitude determination from the aerospace area to adapt it to the MAV literature. The method presented here was evaluated by Monte Carlo simulations, which showed its effectiveness as well as how its performance varies with respect to the number of visible landmarkds and the value of a fadding factor parameter.

For future works, we investigate the use of new attitude determination algorithms and prepare a bench experiment for collecting rate-gyro and camera data using a low-cost single-board Linux computer, all mounted on a Quanser 3D Hover setup.



## Acknowledgements

The authors are grateful for the financial support provided by FAPESP under the grant 2015/04393-2. Moreover, we would like to thank in advance Eng. Diego R. M. Souza, Eng. Luis H. S. Garcia, and Mr. Davi Mesquita for their support in the preparation of a bench experiment for evaluating attitude determination methods from landmark vector measurements. This experiment will be used by our group in future works.

## References

- [1] R. Mahony, V. Kumar, and P. Corke, Multirotor Aerial Vehicles - Modeling, Estimation, and Control of Quadrotor, *IEEE Robotics and Automation Magazine*, 2012.
- [2] R. D'Andrea, The Astounding Athletic Power of Quadcopters <http://www.youtube.com/watch?v=w2itwFJCgFQ>, acessado em setembro de 2013.
- [3] VICON Web Page, <http://www.vicon.com>, acessado em setembro de 2013.
- [4] YANG, Y. Spacecraft attitude determination and control: Quaternion based method. *Annual Reviews in Control*, 36(2), 2012, pp. 198-219.
- [5] WAHBA, G. A Least-Squares Estimate of Satellite Attitude. *SIAM Reviews*, Vol. 8, No. 3, 1965, pp. 384-386.
- [6] SHUSTER, M. D.; OH, S. D. Three-Axis Attitude Determination from Vector Observations. *Journal of Guidance and Control*, Vol. 4, No. 1, 1981, pp. 70-77.
- [7] Shuster, M. D. A Survey of Attitude Representations, *The Journal of the Astronautical Sciences*, 41(4), 1993, 439-517.
- [8] Lefferts, E. J.; Markley, F. L.; Shuster, M. D. Kalman Filtering for Spacecraft Attitude Estimation. *Journal of Guidance, Control, and Dynamics*, Vol. 5, No. 5, 1982, pp. 417-429.
- [9] Krogh, K. *Attitude Determination for AAU CubeSat*. 2002. Master Dissertation. Aalborg University, Aalborg.
- [10] Bar-Itzhack, I. Y. REQUEST - A Recursive QUEST Algorithm for Sequential Attitude Determination. *Journal of Guidance, Control, and Dynamics*, Vol. 19, No. 5, 1996, pp. 1034-1038.
- [11] Bar-Itzhack, I.Y.; Idan, M. Recursive Attitude Determination from Vector Observations: Euler Angle Estimation. *Journal of Guidance*, Vol. 10, No. 2, 1987, pp. 152-157.
- [12] Bar-Itzhack, I. Y.; Oshman, Y. Attitude Determination from Vector Observations: Quaternion Estimation. *IEEE Transactions on Aerospace and Electronic Systems*, Vol. AES-21, No. 1, 1985, pp. 128-135.
- [13] Bar-Itzhack, I. Y.; Reiner, J. Recursive Attitude Determination from Vector Observations: Direction Cosine Matrix Identification. *Journal of Guidance*, Vol. 7, No. 1, 1984, pp. 51-56.
- [14] Choukroun, D.; Oshman, Y.; Bar-Itzhack, I. Y. Optimal-REQUEST Algorithm for Attitude Determination. *Proceedings of the AIAA Guidance, Navigation and Control Conference*, Montreal, Quebec, Aug, 2001.

- [15] Markley, F. L. Attitude Determination Using Vector Observations: Theory. *Journal of the Astronautical Sciences*, Vol. 37, No. 1, January-March 1989, pp. 41-58.
- [16] Markley, F. L. Attitude Error Representations for Kalman Filtering. *Journal of Guidance, Control, and Dynamics*, Vol. 26, No. 2, 2003, pp. 311-317.
- [17] Wertz, J. (ed.) *Spacecraft Attitude Determination and Control*. The Netherlands: Kluwer Academic Publishers, 1978.
- [18] Markley, F.L.; Crassidis, J.L. *Fundamentals of Spacecraft Attitude Determination and Control*. New York: Springer, 2014.
- [19] Markley, L. F.; Mortari, D. How to Compute Attitude from Vector Observations. *AAS/AIAA Astrodynamics Specialist Conference*, Girdwood, AK, August 15-19, 1999.
- [20] Stuelpnagel, J. On the Parameterization of the Three-Dimensional Rotation Group. *SIAM Reviews*, Vol. 6, No. 4, 1964, pp. 422-430.
- [21] Bar-Itzhack, I.Y.; Cohen Y. Geometry Based Euler-Vector and Quaternion Recursive-Estimators. *AIAA Guidance, Navigation, and Control Conference and Exhibit*, Aug, 2005, San Francisco, California.
- [22] Shabayek, A. E. R.; Demonceaux, C.; Morel, O.; Fofi, D. Vision Based UAV Attitude Estimation: Progress and Insights. *Journal of Intelligent & Robotic Systems*, Vol. 65, 2012, pp. 295-308.
- [23] Zhang, T; LI, W.; Achtelik, M.; Kuhnlenz, K.; Buss, M. Multi-Sensory Motion Estimation and Control of a Mini-Quadrotor in an Air-Ground Multi-Robot System. *IEEE International Conference on Robotics and Biomimetics (ROBIO)*, 2009.
- [24] Waldmann, J. Derivation of Coning Motion for Benchmarking Attitude Determination Algorithms. *III Simpósio Brasileiro de Engenharia Inercial (SBEIN)*, Rio de Janeiro, 2001.
- [25] Magnussen, O.; Ottestad, M.; Hovland, G. Experimental Validation of a Quaternion-Based Attitude Estimation with Direct Input to a Quadcopter Control System. *International Conference on Unmanned Aircraft Systems (ICUAS)*, Atlanta, 2013, pp. 480-485.
- [26] Martin, P.; Salaun, E. Design and Implementation of a Low-Cost Observer-Based Attitude and Heading Reference System. *Control Engineering Practice*. Vol. 18, No. 7, 2010, pp. 712-722.